


Wireless M-Bus option Specifications

The RTCU NX-400 offers optional support for the industry standard Wireless M-Bus. Wireless M-Bus was originally defined for Smart Metering (i.e., Meter-Bus), but it's also the ideal solution for Industrial Wireless Sensor Networks. Wireless M-Bus has been developed and proven over many years for Smart Metering applications.

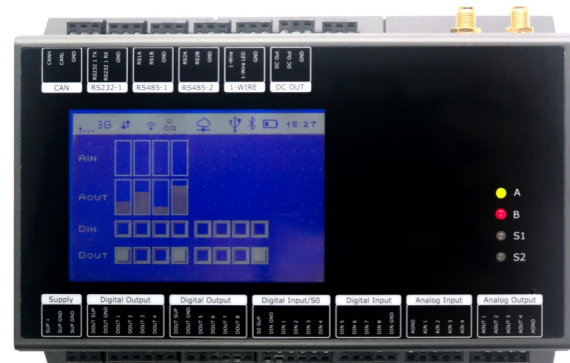


Key Features and Technical Data:

Wireless M-Bus specifications:

- ◆ Long Range with up-to 1000 meters.
- ◆ Lightweight protocol.
- ◆ Support for uni-directional or bi-directional communication.
- ◆ Operating on license-free ISM bands.
- ◆ 868 MHz, 433 MHz, and 169 MHz options.
- ◆ Support for AES-128 encryption/authentication.
- ◆ Support for C,R,S,T modes.
- ◆ Interoperability with many vendors.
- ◆ Four regional versions available:
 - WM1: 868 Mhz / EU CE.
 - WM2: 868 MHz / Russia.
 - WM3: 865 MHz / India.
 - WM4: 433 MHz / non-EU.
- ◆ External SMA male connector.
- ◆ Factory installed option. Can not be retrofitted. (RS485 port 2 can not be used with this option.)

Powerful software features:

- ◆ User-friendly high-level API.
- ◆ Full encryption support.
- ◆ Comprehensive documentation with example project.
- ◆ Software support implemented as an RTCU M2M Platform Extension module.
- ◆ Open source allowing further customization.



Logic IO Worldwide Headquarters

Holmboes Allé 14
8700 Horsens
Denmark
Phone: +45 7625 0210
Fax: +45 7625 0211
Commercial enquiries: sales@logicio.com
Technical support: support@logicio.com
www.logicio.com

Models Available

SKU:
RT-FO-WBUS1 RT-FO-WBUS2
RT-FO-WBUS3 RT-FO-WBUS4